

Application

Recommended for processing all kinds of special components and components in special shape.

Features

1. High precision short cylindrical center mounting.

2.All kinds of jaws can be provided, the jaws are two-piece ones and the top jaws are


soft ones.


3.Flimsy parts are specifically engineered engineered by quenching, for greater

durability and extended life.

4. High self-centring precision to the superior gripping force demands.





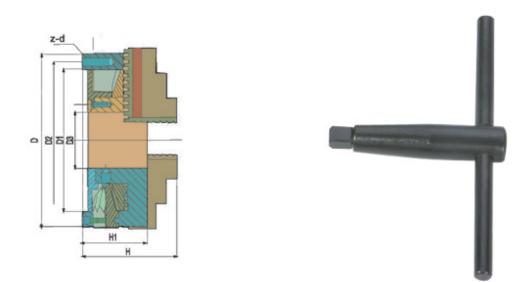

Application

Recommended for processing all kinds of special comp-onents and components in special shape.

Features

- 1. High precision short cylindrical center mounting.
- 2. All kinds of jaws can be provided, the jaws are two-piece ones and the top jaws are soft ones.
- 3. Flimsy parts are specifically engineered engineered by quenching, for greater durability and extended life.
- 4. High self-centring precision to the superior gripping force demands.

Dimension characterstic parameters

Size	D1	D2	D3	Н	H1	h	z-d
125F	95	108	30	97	58	4	3-M8
130F	100	115	30	99	60	3.5	3-M8
160F	130	142	40	115	65	5	3-M8
200F	165	180	65	132	75	5	3-M10
250F	206	226	80	146	82	5	3-M12
325F	272	296	100	184	96	12	3-M16
380F	325	350	135	186	98	6	3-M16

K10short taper series have the same mountong dimensions as K11 three-jaw short tape series.